



TORQUE WRENCH

• PNEUMATIC

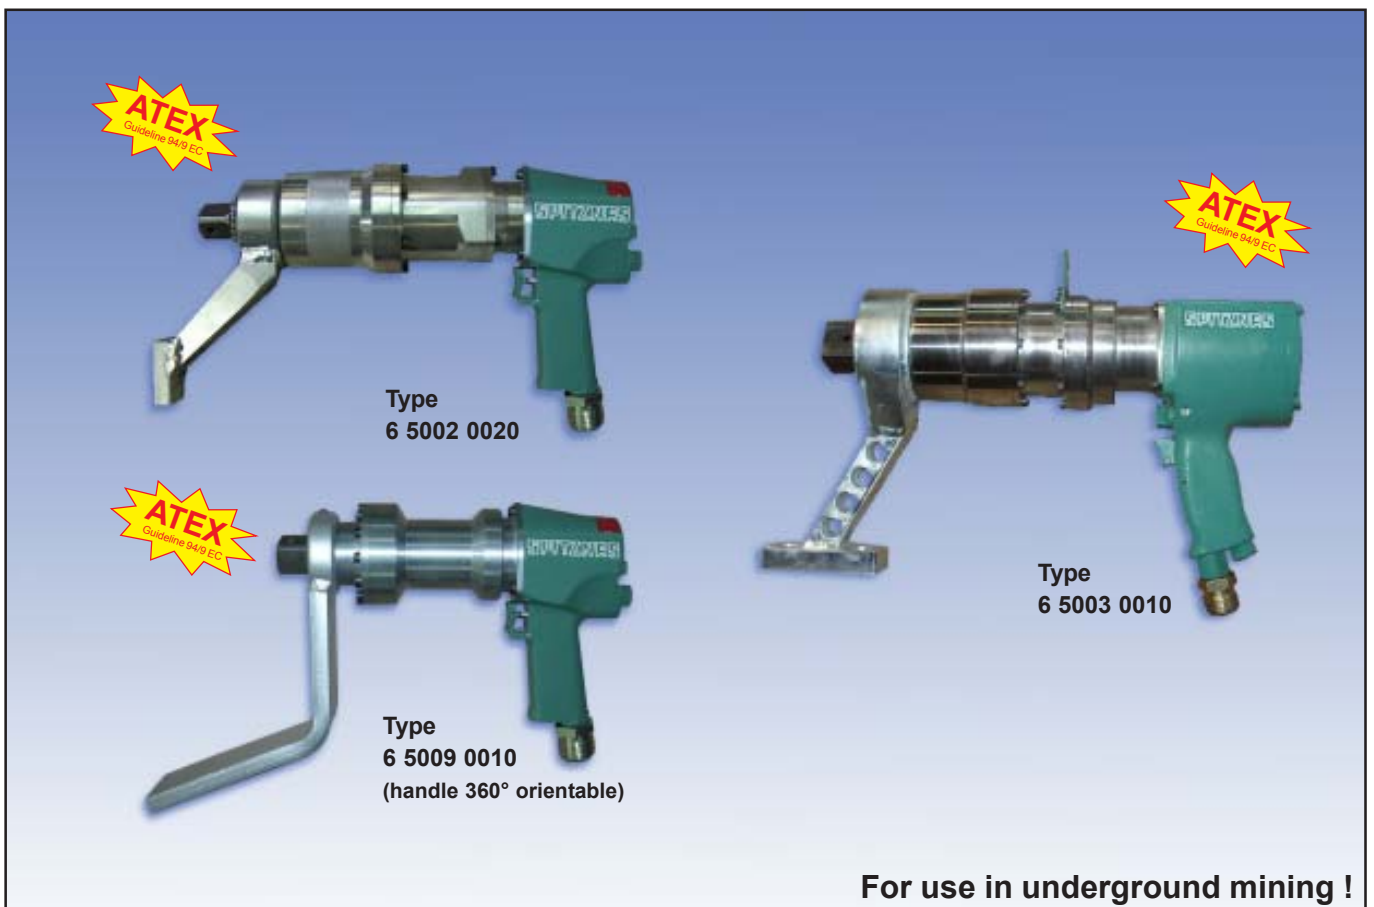

TECHNICAL SPECIFICATION

Type	Square drive for bolts up to	Width across flats	Tightening torque at flow pressure		Air consumption at flow pressure		Hose I.D.	Air connection	Direction of rotation/reversible	Weight without torque arm	Weight of torque arm	Noise level at 1 m distance	Vibration level at free speed
			4 bar	6 bar	4 bar	6 bar							
6 5002 0020	1"	M30 30-50	1000	1200	0.55	0.75	10	Rd32x1/8"	right/left	8.6	1.8	86.4	<2.5
6 5009 0010	1"	M30 30-50	650	750	0.55	0.75	10	Rd32x1/8"	right/left	7.8	2.4	86.4	<2.5
6 5003 0010	1 1/2"	M48 55-75	2800	3600	1.30	1.70	10	Rd32x1/8"	right/left	14.9	3.2	93.0	<2.5

 IM2cT6 - Safety class ATEX, machine group I, categorie M2, structural safety, temperature class 6