



SPITZNAS
CUSTOMIZED POWER SOLUTIONS



ANGLE GRINDERS AND VERTICAL GRINDERS

TOOLS FOR THE SPECIALIST



PNEUMATIC



HYDRAULIC



SYSTEM CONCEPT



Various tool holders available



Handle is mountable on the left or on the right side



Type for underwater operation with exhaust backwards



For grinding discs or rough grinding wheels

Exhaust sidewise

Air connection



PNEUMATIC

Pneumatic angle grinders are available in different power classes and with different tool holders. Type 1 4311 0050 is also usable for underwater operation.



Type 1 4311... / 1 4312 ...





Type 1 5031-44 ...



Type 1 1488 ...



Type 1 2140 ... / 1 2150

| | | | PNEUMATIC | |  | OPERATING PRESSURE | | 6 Bar | UNDERWATER OPERATION ¹⁾ | |  |
|---------------------------|---|----------------|--------------|-------|--|--------------------|-----------------|--------|------------------------------------|--|---|
| ORDER NO. | Max. disc diameter | Valve type | Speed (free) | Power | Air consumption | Noise level LpA | Vibration level | Weight | | | |
| | mm | | rpm | kW | m³/min | dB(A) | m/s² | kg | | | |
| 1 5043 0020 | 80.00 (for cup brushes) | Twist throttle | 8,000 | 0.70 | 0.85 | 85.6 | <2.5 | 2.0 | | | |
| 1 5044 0010 | | Lever valve | | | | | | 1.9 | | | |
| 1 5039 0020 | 120.00 (for rubber discs) | Twist throttle | 8,000 | 0.70 | 0.85 | 85.6 | <2.5 | 2.0 | | | |
| 1 5040 0010 | | Lever valve | | | | | | 1.9 | | | |
| 1 4312 0010 | 125.00 (for grinding discs/rough grinding wheels) | Twist throttle | 11,600 | 0.30 | 0.64 | 88.5 | <2.5 | 1.6 | | | |
| 1 4311 0010 | | Lever valve | | | | | | 1.7 | | | |
| 1 4311 0050 ¹⁾ | | Lever valve | | | 1.00 | | | 2.5 | | | |
| 1 5031 0020 | | Twist throttle | 8,000 | 0.70 | 0.85 | 85.6 | | 2.0 | | | |
| 1 5032 0010 | Lever valve | 1.9 | | | | | | | | | |
| 1 5035 0020 | Twist throttle | 12,000 | 2.0 | | | | | | | | |
| 1 5036 0010 | Lever valve | | 1.9 | | | | | | | | |
| 1 1488 0050 | 178.00 (for grinding discs/rough grinding wheels) | Twist throttle | 7,200 | 1.00 | 1.40 | 86.5 | <2.5 | 4.3 | | | |
| 1 1488 0150 | | Lever valve | | | | | | | | | |
| 1 2150 0010 | 180.00 (for grinding discs/rough grinding wheels) | Lever valve | 7,200 | 3.60 | 3.90 | 98.5 | <2.5 | 5.9 | | | |
| 1 2140 0010 | 230.00 (for grinding discs/rough grinding wheels) | Lever valve | 6,500 | 3.60 | 3.60 | 98.5 | <2.5 | 6.0 | | | |

Subject to technical change.

¹⁾ to use for underwater operation

Performance data at an operating pressure of 6 bar.

TECHNICAL DATA

SYSTEM CONCEPT




Disc diameter up to 180 mm



Lever valve with self lock



Hydraulic hoses with quick coupling

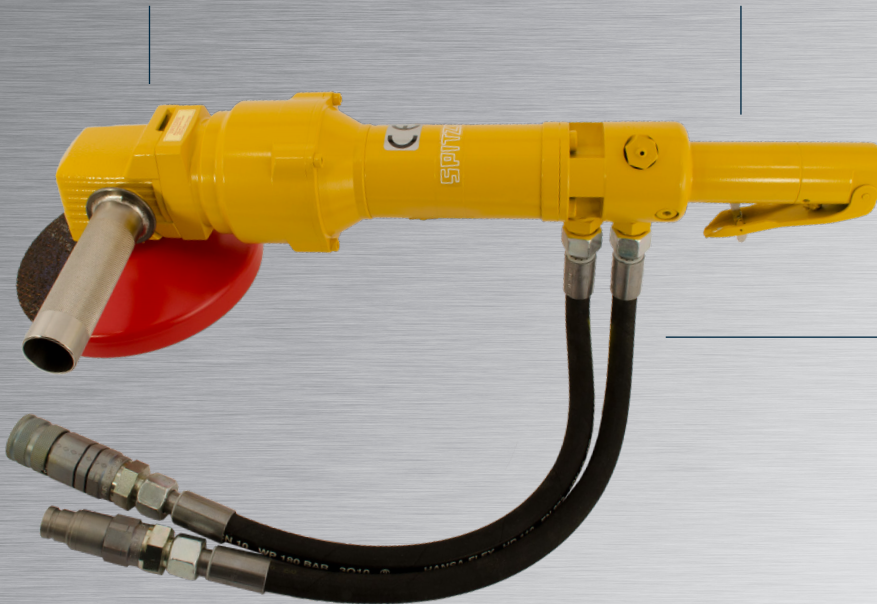

For grinding discs or rough grinding wheels



Lever valve with self lock





Hydraulic connection



HYDRAULIC

Powerful angle grinder based on a hydraulic drive, maximum cutting and abrasion work, as well usable under water.



| ORDER NO. | Max. disc diameter (for underwater operation) | Valve type | HYDRAULIC  | | OPERATING PRESSURE 90-140 Bar | | UNDERWATER OPERATION  | |
|--------------------|---|-------------|--|-------|-------------------------------|-----------------|--|--------|
| | | | Speed (free) | Power | Volume flow | Noise level LpA | Vibration level | Weight |
| | mm | | rpm | kW | l/min | dB(A) | m/s ² | kg |
| 1 1585 0010 | 180.00 (125.00) (for grinding discs/rough grinding wheels) | Lever valve | 5,500 | 1.80 | 20 | 94.8 | <2.5 | 7.6 |



Subject to technical change.

Performance data at an operating pressure of 90 bar.

HYDRAULIC

The powerful vertical grinder, ideal for all hard grinding work, also usable for underwater work.



| ORDER NO. | Max. disc diameter | Valve type | HYDRAULIC  | | OPERATING PRESSURE 90-140 Bar | | UNDERWATER OPERATION  | |
|--------------------|---|-------------|--|-------|-------------------------------|-----------------|--|--------|
| | | | Speed (free) | Power | Volume flow | Noise level LpA | Vibration level | Weight |
| | mm | | rpm | kW | l/min | dB(A) | m/s ² | kg |
| 1 2060 0010 | 230.00 (for grinding discs/rough grinding wheels) | Lever valve | 3,600 | 3.50 | 20-45 | 98.0 | 3.0 | 5.8 |

Subject to technical change.

Performance data at an operating pressure of 90 bar.

TECHNICAL DATA


SYSTEM CONCEPT



Tool holder with protective hood




Second handle

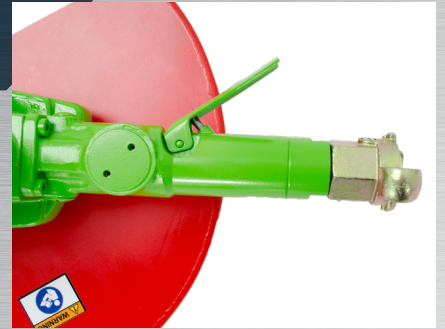


Lever valve with self retraction or
twist throttle and sensor block



Exhaust sidewise

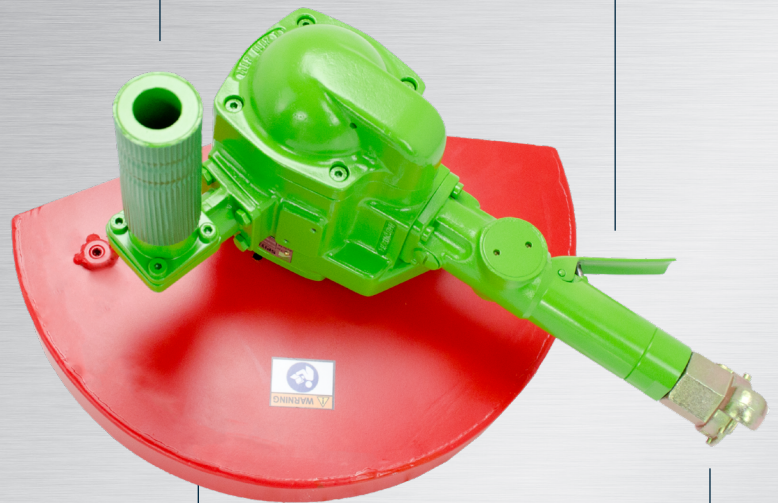

Safety sensor block

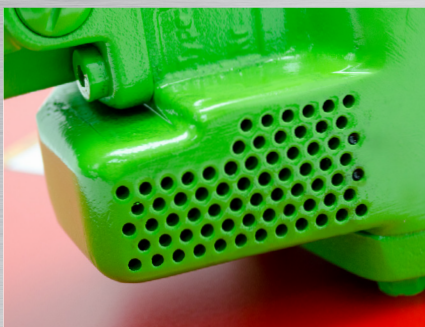

Air connection



PNEUMATIC

Pneumatic vertical grinders are available in different power classes and disc diameters.



PNEUMATIC



OPERATING PRESSURE 6 Bar

| ORDER NO. | Max. disc diameter | Valve type | Speed (free) | Power | Air consumption | Noise level LpA | Vibration level | Weight |
|--------------------|---|-------------|---|-------|-----------------|-----------------|-----------------|--------|
| | mm | | rpm | kW | m³/min | dB(A) | m/s² | kg |
| 1 1834 0010 | 125.00 (for grinding discs/rough grinding wheels) | Lever valve | 12,200 | 1.20 | 1.25 | 94.8 | <2.5 | 2.6 |
| 1 1840 0010 | 180.00 (for grinding discs/rough grinding wheels) | | 8,500 | 1.00 | 1.25 | 95.3 | | 2.9 |
| 1 2034 0010 | | | | 2.70 | 2.60 | 89.6 | | 4.4 |
| 1 2040 0010 | | | 230.00 (for grinding discs/rough grinding wheels) | 6,500 | 2.30 | 2.30 | | 98.3 |
| 1 2122 0010 | 350.00 (for grinding discs/rough grinding wheels) | | 5,100 | 3.75 | 3.20 | 98.5 | | 10.5 |

Subject to technical change.

Performance data at an operating pressure of 6 bar.

TECHNICAL DATA

SYSTEM ACCESSORIES

HOSES WITH LUBRICATOR

We recommend to use hoses with lubricator when the service unit is not installed upstream to the machine.


| ORDER NO. | Description |
|--------------------|--|
| 9 3610 0180 | Hose 2.5 m, ID 10 mm, with automatic lubricator R 1/4" |
| 9 3610 0350 | Hose 2.5 m, ID 13 mm, with automatic lubricator R 1/2" |



SERVICE UNITS

Portable service units for safe operation and protection of your grinder.

| ORDER NO. | Pos. | Description |
|--------------------|------|---|
| 9 2406 0260 | 1 | Portable service unit with pressure regulator 3/4" |
| 9 2406 0630 | 2 | Portable service unit with protection housing and pressure regulator 1/2" |
| 9 2406 0650 | 2 | Portable service unit with protection housing and pressure regulator 3/4" |



ACCESSORIES AND CONSUMABLES

The easy and safe storage with our carrying case and the use of our multi oil guarantees the optimum condition of your machine.

| ORDER NO. | Pos. | Description | For type |
|--------------------|------|---|---|
| 9 1301 0100 | 1 | Spanner AF24 according to DIN894 | |
| 9 1417 0080 | 2 | Pin type face spanner 11-60 (dia. 4) mm | |
| 1 4310 6900 | | Handle assembly | 1 4311 ..., 1 4312 ... |
| 9 9910 0090 | 3 | Carrying case | 1 1470, 1 1472, 1 1474, 1 4312, 1 50... |
| 9 9902 0020 | 4 | Pneumatic oil 50 ml | |
| 9 9902 0470 | 5 | Pneumatic oil 1000 ml | |
| 9 9902 0120 | 6 | Multi oil for cleaning and protection | |

More accessories on request.



GRINDERS RANGE

DIE GRINDERS



AXIAL GRINDERS



ANGLE-/ AND VERTICAL GRINDERS

